


Product Name	Type of LED/K Color	Size	Grid Type	Optic	Mounting Clips	Color
TBSL = T-BAR LED	HW = Warm White 3000K	2 = 2 ft	24 = 15/16"	B = Block Clear Diffusing Lens	U = Universal A = Armstrong C = Custom	W = White C = Custom
	MW = Medium Warm 3500K	4 = 4 ft	15 = 9/16"			
	MN = Medium Neutral 4000K	5 = 5 ft	15B = 9/16" Bolt Slot			
	HN = Neutral White 4500K	4L = 4 ft L	24C = 15/16" Partially Concealed Grid			
		6 = 60 cm				
		12 = 120 cm				
		12L = 120 cm L				

Patent No. 8,177,385; 9,879,850; 004481000-0002. Additional patents are pending.


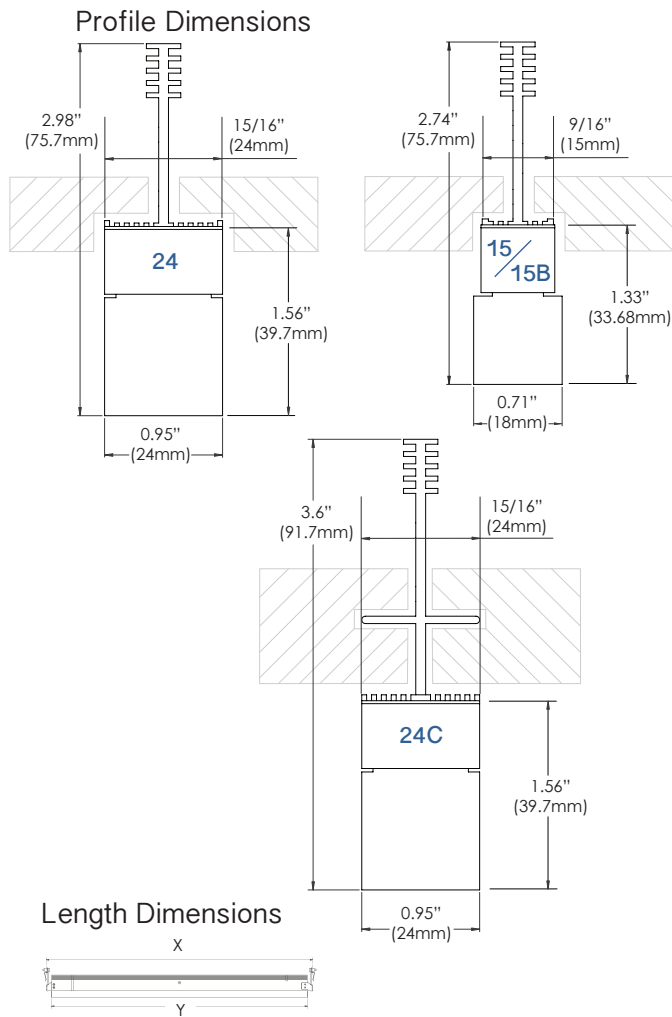


CRI = >82

**LIGHT OUTPUT:**

15/16"- 564lm per foot  
71.6lm/W

9/16"- 457lm per foot  
58lm/W



**NOTES:**

T-BAR LED modules can be parallel connected up to 12 linear feet max per power supply. Remote power supply includes JB compartment for AC input direct wiring with metal conduit. Max distance from power supply to fixtures is 30 feet with 18 AWG wire. Longer distance achievable if using higher gauge wire. Color filters and/or special acrylic sizes available on request, consult factory.

**APPLICATIONS:**

Executive, Medical, Health, Educational, Retail, Hotels, Airport, Hospitality and any open space areas that require a unique and elegant architectural lighting design.

**MOUNTING:**

Universal mounting brackets are for easy installation to standard 15/16" or 9/16" T-Bars of most manufacturers' ceiling suspension systems. Armstrong compatible mounting clips for installation with Armstrong Ceiling 15/16" Prelude® and Clean Room™, 9/16" Suprafine®, Silhouette®, Sonata®, Interlude®, and DC FlexZone™ suspension systems.

**MATERIALS:**

Anodized and painted aluminum extruded body, steel mounting clips, white PC end caps, high transmitting acrylic PMMA lens.

**ELECTRIC:**

High output LEDs consume 16W total (2 foot) or 32W total (4 foot) or 40W total (5 foot). Power supply consumption not included. Input voltage 24VDC. Class 2 plenum rated cables at each end equipped with quick connectors to allow multiple modules to be easily connected together (max 12 linear feet of product). Use solid copper wire or wire ferrules to fit into quick connectors.

**WARRANTY:**

5 years

**LISTINGS:**

ETL/cETLus CE RoHS Indoor use only.

Size	Grid Type	X	Y
2 = 2ft	24 = 15/16"	24"	23"
4 = 4ft	24 = 15/16"	48"	47"
5 = 5ft	24 = 15/16"	60"	59"
4L = 4ft L	24 = 15/16"	48"	24"
2 = 2ft	15 = 9/16"	24"	23.4"
4 = 4ft	15 = 9/16"	48"	47.4"
5 = 5ft	15 = 9/16"	60"	59.4"
4L = 4ft L	15 = 9/16"	48"	24"

