


### T-BAR LED™ for **Armstrong®** Vector® CEILING SOLUTIONS

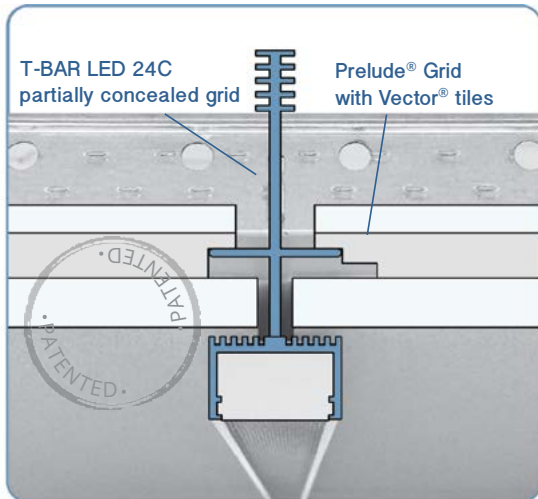

The T-BAR LED™ for partially concealed grid systems is a new extrusion design by JLC-Tech. This product was especially designed to be compatible with Armstrong® Ceilings' Vector® tiles and grid suspension systems. The elongated spine on the extrusion allows for the installation of the special tiles that partially conceal the grid from view.

This modified T-BAR LED is compatible with Optima®, Ultima®, Calla®, Lyra® Vector® tiles with 1/4" partially concealed reveal.

#### Grid Type



24 = 15/16"

15 = 9/16"

15B = 9/16" Bolt Slot





**24C = 15/16" Partially Concealed Grid**

#### Vector® tile edge detail

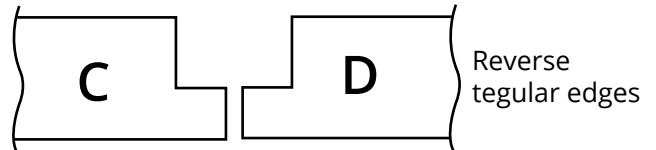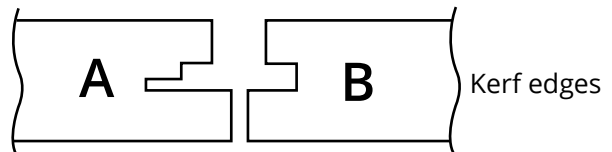


\* The T-BAR LED™ with Vector® tiles can only be installed along the A and B kerf edges of the tile.

\* T-BAR LED™ Vector layouts must always be linear and/or parallel to each other, therefore any X, T, or L configurations are not possible.




## T-BAR LED™ Vector Design Guide


\* If **only the Kerf B edge** of the Vector® tiles is facing the T-BAR LED™ Vector, then no field adjustment of the tiles is necessary.

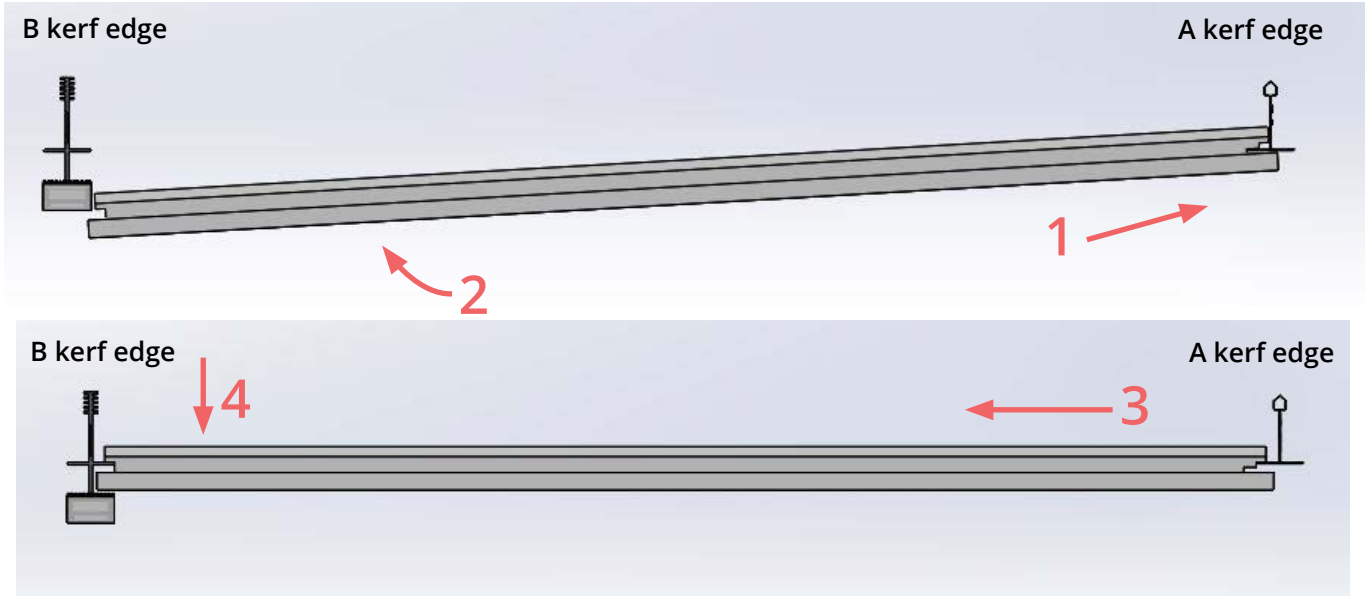

\* If **both the Kerf A and B edge** of the Vector® tiles are facing the T-BAR LED™ Vector, field adjustment of the tiles is necessary, (both Kerf edges must be cut).

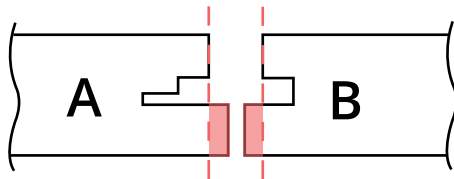

*For more information on cutting tiles or for configurations not listed here, please consult factory.*

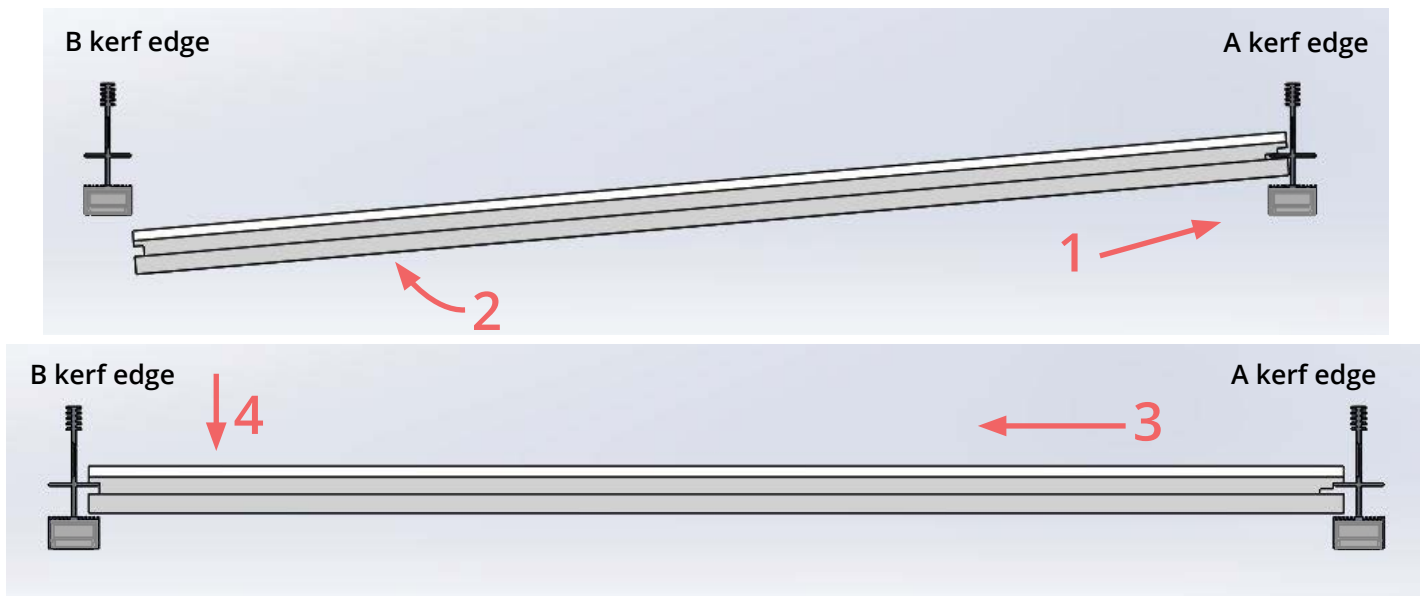

*(The T-BAR LED product line is protected under the following patents: Patent No. 8,177,385; 9,879,850; 004481000-0002. Additional patents are pending.)*

MADE IN USA