

T-BAR RGBW Remote Controllers | Order Specification Guide

Controller Item Number	Description
TBRGB-LIN100D2	eldoLED LINEARdrive DC, 100W, DMX/RDM controllable, 4 control channels, constant voltage, 4x LED outputs
TBRGB-CBU-PWM4	Casambi CBU-PWM4, Bluetooth controllable 4ch PWM dimmer

WARRANTY: 5 years




**eldoLED LINEARdrive 100D**

Lineardrive 100W DMX control

A low voltage DMX controller that features four LED outputs that can be controlled individually via DMX. When paired with a T-BAR RGBW power supply, it can control up to 6ft of T-BAR RGBW fixtures.

*eldoLED dimensions*


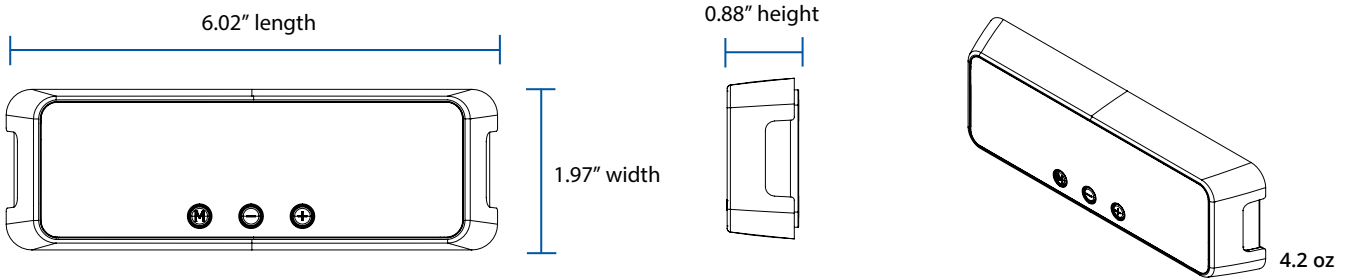


**Casambi CBU-PWM4**

4ch PWM dimmer Bluetooth control

A low voltage Bluetooth controller with four LED outputs, controlled with the free Casambi app. When paired with a T-BAR RGBW power supply, it can control up to 6ft of T-BAR RGBW fixtures, and up to 127 Casambi units can form an intelligent mesh network.

*Casambi dimensions*

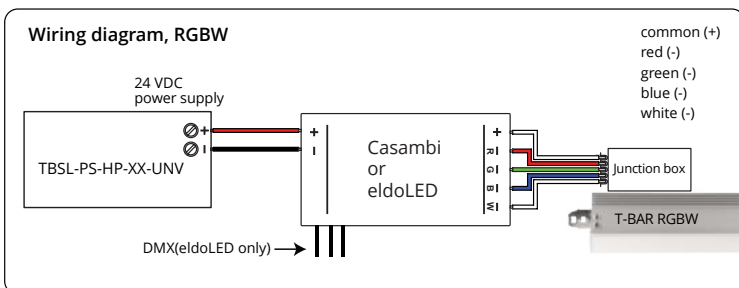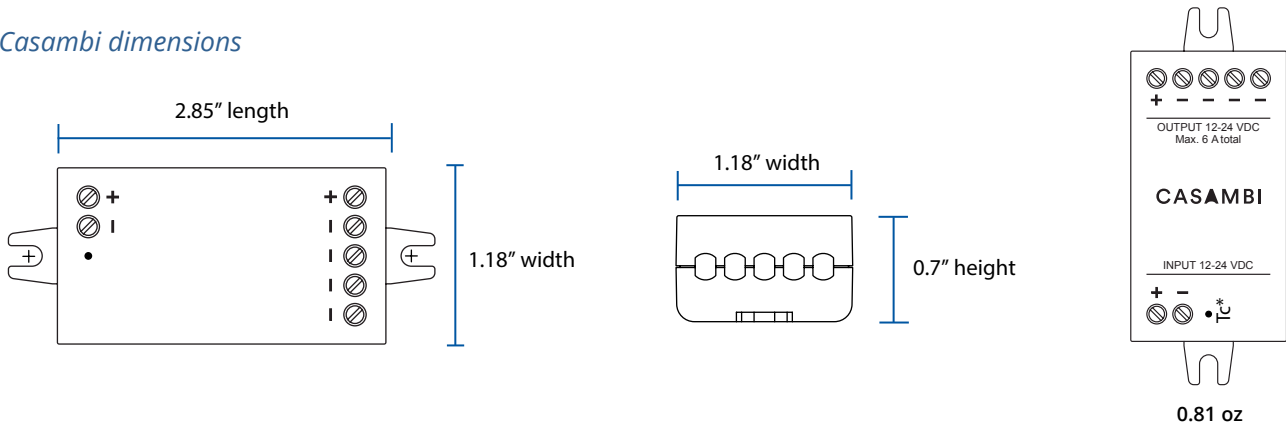

**Wiring Chart:**

Gauge	Length
18 (0.75 mm <sup>2</sup> )	30ft (9m) maximum
16 (1.5 mm <sup>2</sup> )	45ft (14m) maximum
14 (2.0 mm <sup>2</sup> )	70ft (21m) maximum

*Extra cables for longer distances, by others*