


T-BAR RGBW Remote Drivers | Order Specification Guide



Product Name	Driver Type	Power	Wattage	Voltage
TBSL = T-BAR LED Power Supply	PS = Non Dimmable	HP = High Power	100W = 96W 200W = 192W 400W = 384W	UNV = Universal 100-277V

WARRANTY: 5 years




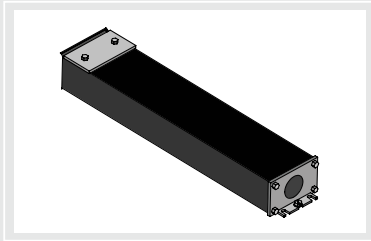


24VDC LED Driver 96W Power Supply

non dimmable

T-BAR RGBW modules can be parallel connected up to 6 linear feet max per power supply, when paired with a T-BAR RGBW controller. Power supply includes JB compartment for AC input direct wiring with metal conduit.

96W Power Supply dimensions

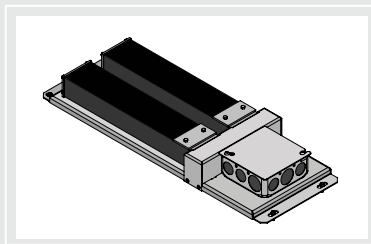


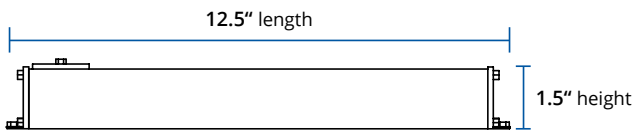


24VDC LED Driver 192W Power Supply

non dimmable

T-BAR RGBW modules can be parallel connected up to 6 linear feet max per channel totaling 12 linear feet of illuminated product, when paired with a T-BAR RGBW controller. Power supply includes JB compartment for AC input direct wiring with metal conduit.

192W Power Supply dimensions

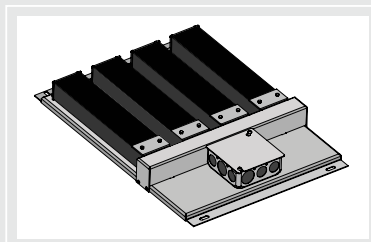

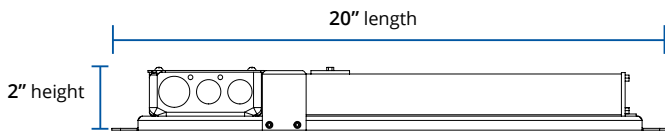


24VDC LED Driver 384W Power Supply

non dimmable

T-BAR RGBW modules can be parallel connected up to 6 linear feet max per channel totaling 24 linear feet of illuminated product, when paired with a T-BAR RGBW controller. Power kit includes JB for AC input direct wiring with metal conduit.

384W Power Supply dimensions

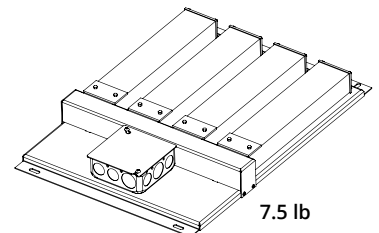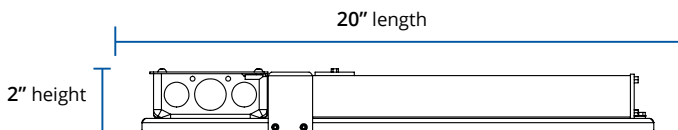

T-BAR RGBW Remote Controllers | Order Specification Guide

Controller Item Number	Description
TBRGB-LIN100D2	eldoLED LINEARdrive DC, 100W, DMX/RDM controllable, 4 control channels, constant voltage, 4x LED outputs
TBRGB-CBU-PWM4	Casambi CBU-PWM4, Bluetooth controllable 4ch PWM dimmer

WARRANTY: 5 years




eldoLED LINEARdrive 100D

Lineardrive 100W DMX control

A low voltage DMX controller that features four LED outputs that can be controlled individually via DMX. When paired with a T-BAR RGBW power supply, it can control up to 6ft of T-BAR RGBW fixtures.

eldoLED dimensions


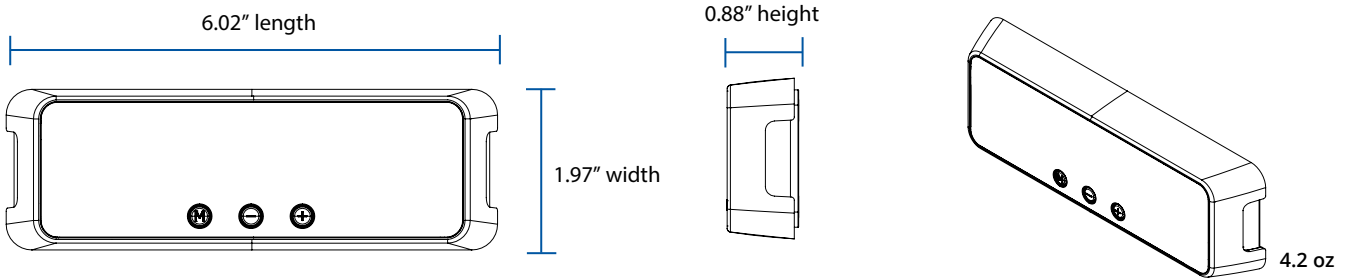


Casambi CBU-PWM4

4ch PWM dimmer Bluetooth control

A low voltage Bluetooth controller with four LED outputs, controlled with the free Casambi app. When paired with a T-BAR RGBW power supply, it can control up to 6ft of T-BAR RGBW fixtures, and up to 127 Casambi units can form an intelligent mesh network.

Casambi dimensions

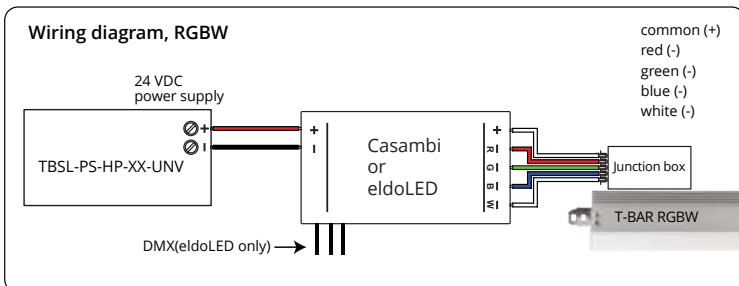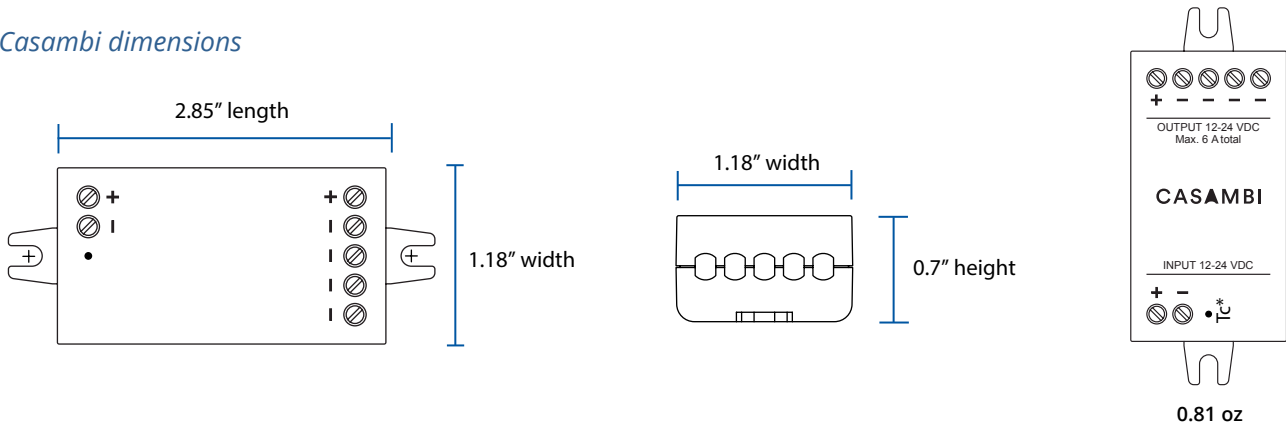

Wiring Chart:

Gauge	Length
18 (0.75 mm ²)	30ft (9m) maximum
16 (1.5 mm ²)	45ft (14m) maximum
14 (2.0 mm ²)	70ft (21m) maximum

Extra cables for longer distances, by others